




Premieres  
Sunday Sept. 29  
at 6pm/5c on 

# Sword of Destiny

BLADE

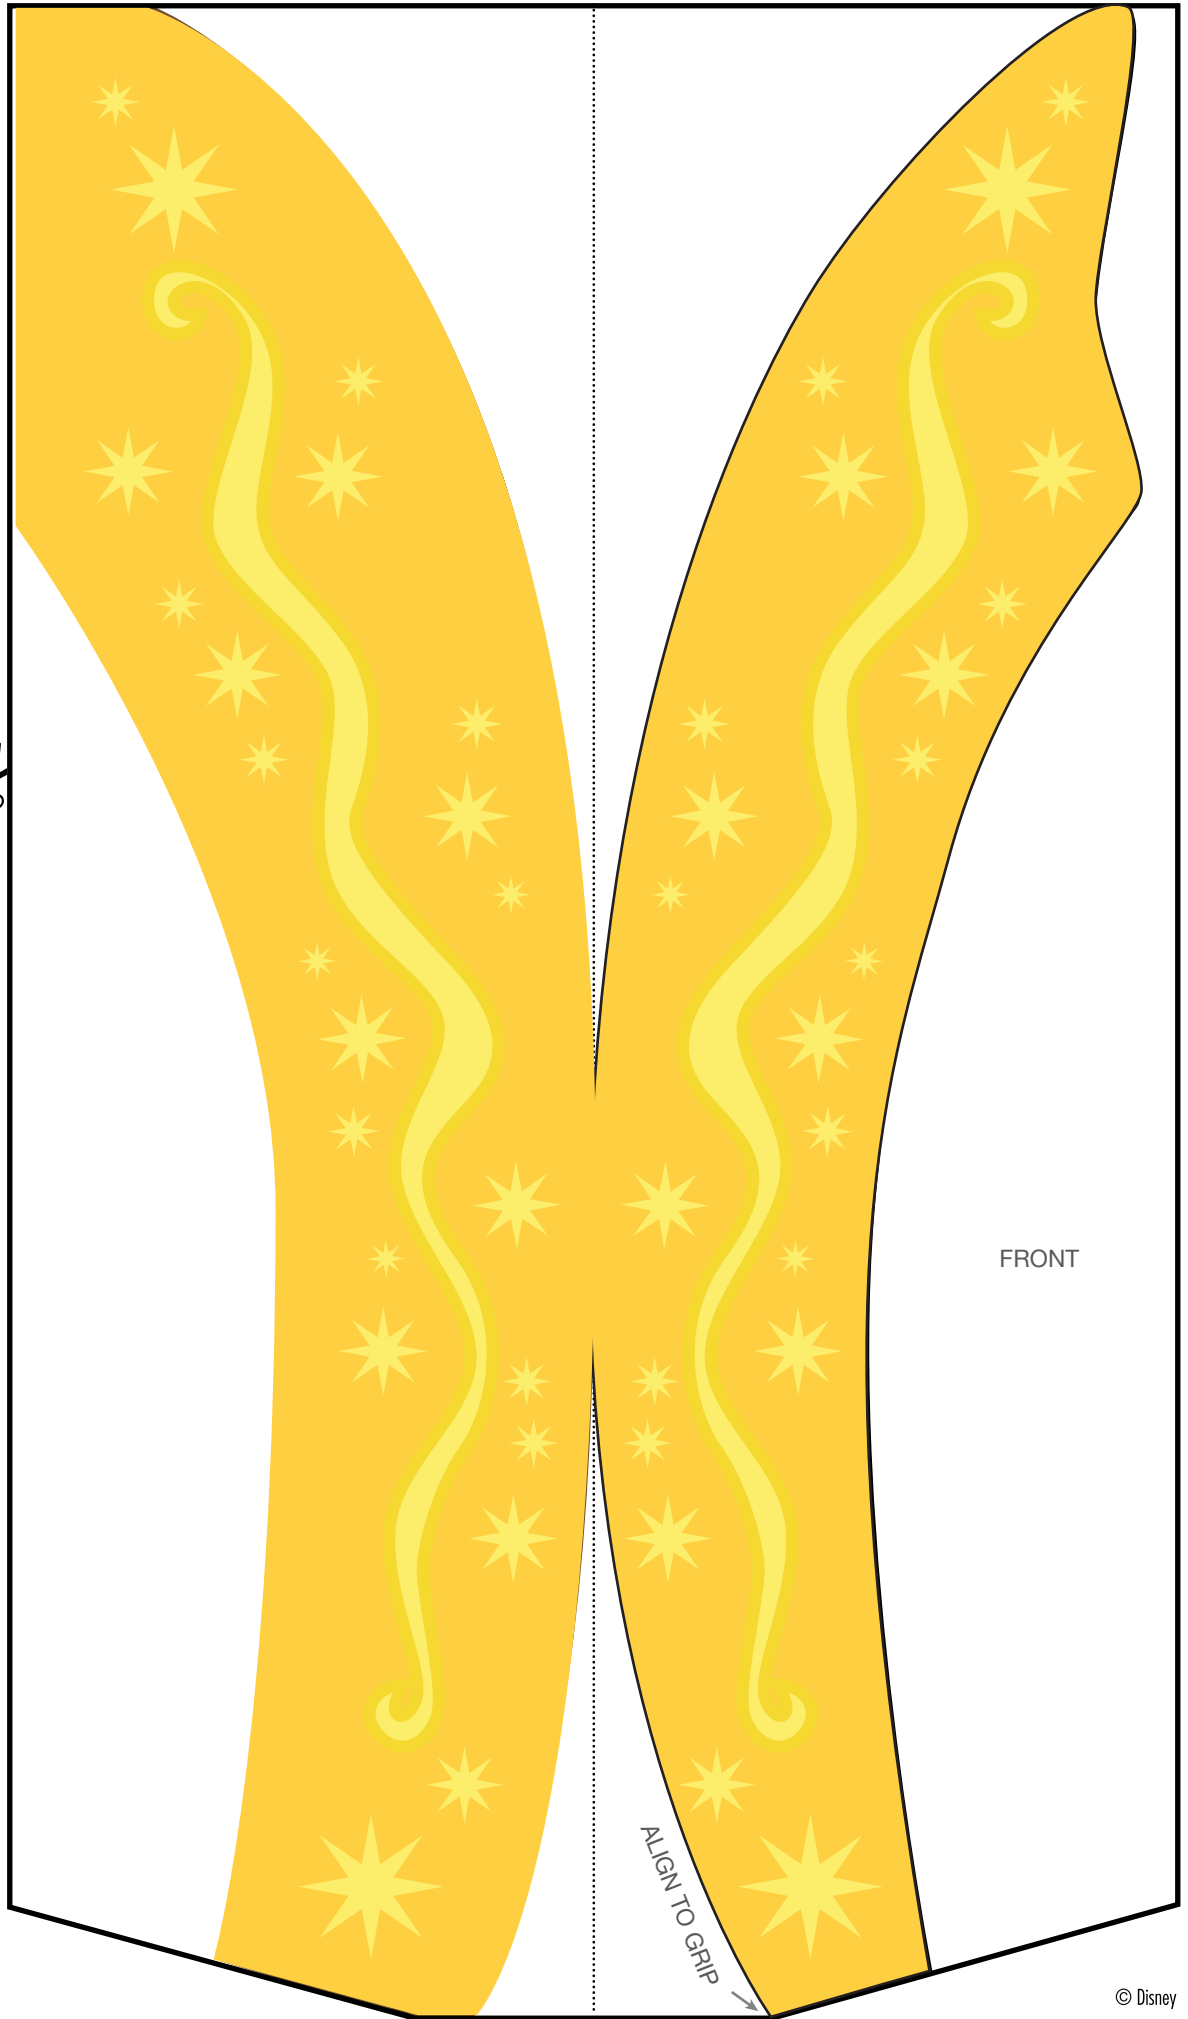

FRONT


ALIGN TO GRIP →




Premieres  
Sunday Sept. 29  
at 6pm/5c on




CROSSBAR

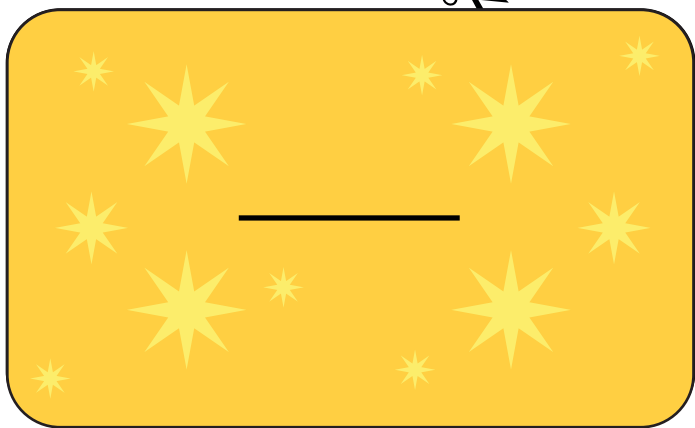

GUARD

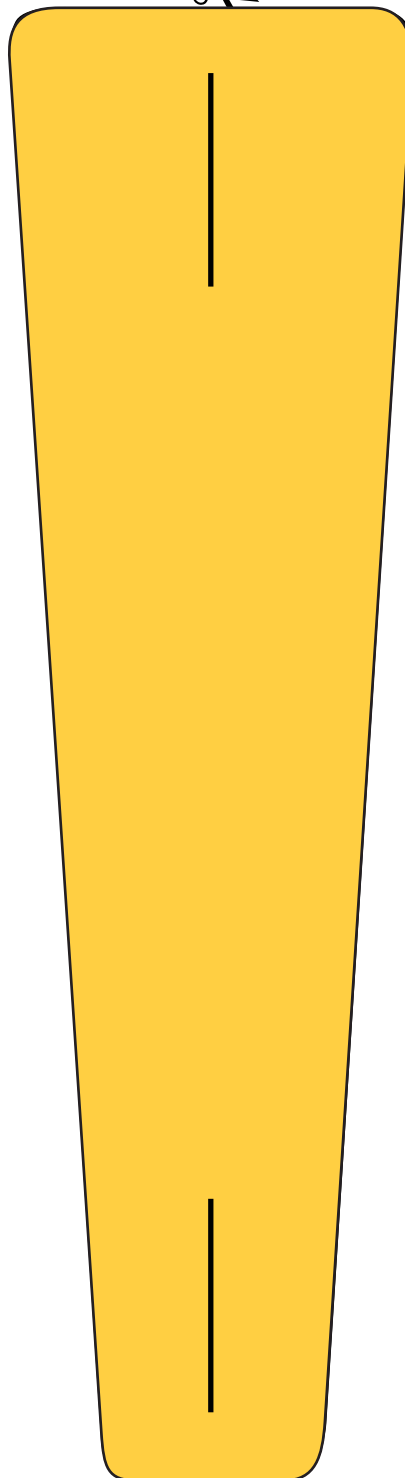

GRIP

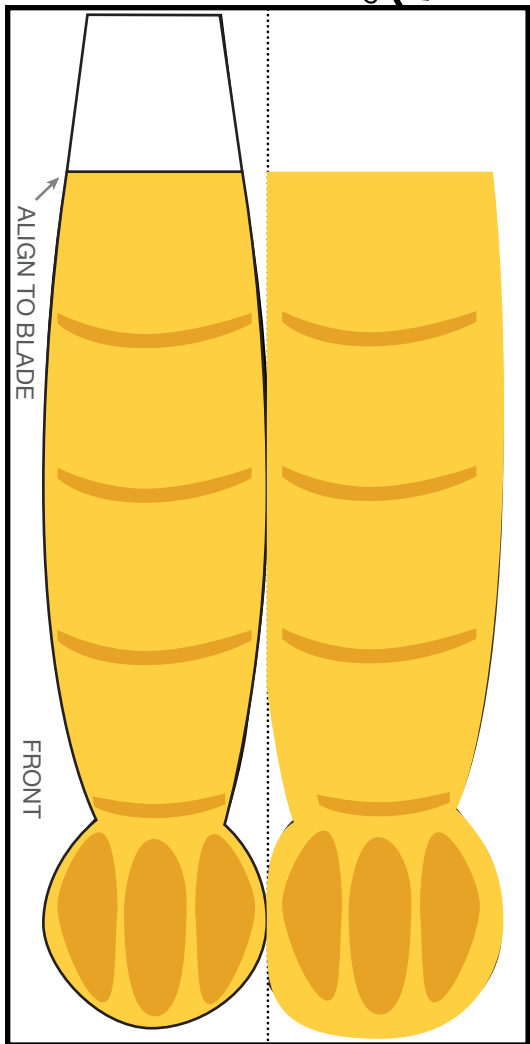

ALIGN TO BLADE

FRONT



Premieres  
Sunday Sept. 29  
at 6pm/5c on 

# Instructions

Cutting and scoring intended for grown-ups only.

**TIP:** For best results, use a thicker paper, such as cover stock with a weight of 60-100 lbs.

## MATERIALS:

- Butter knife
- Scissors or craft knife
- Cutting mat (optional)
- Non-toxic multipurpose glue


1. Score along all the dotted lines.




2. Cut out all pieces along the outer solid lines. For now, only cut along the outer box for the blade and grip.




3. Carefully cut the slits in the crossbar and guard.




4. Fold grip along dotted lines and glue closed.




5. Fold blade along dotted line. Align the front side of grip and blade, as shown below, and glue in place.

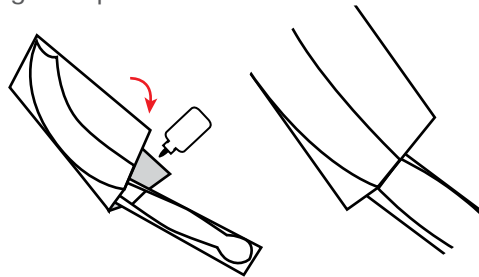


6. Cut out sword along the outer solid lines.

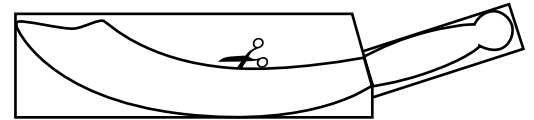

7. Slide crossbar onto grip.

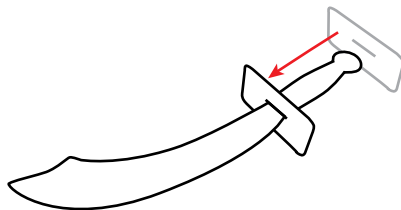

8. Slide guard onto grip and you're done!

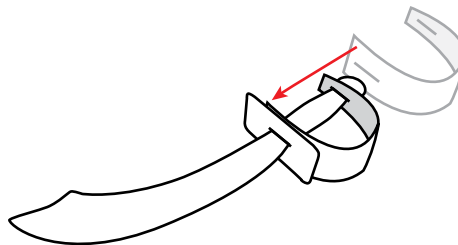




Premieres  
Sunday Sept. 29  
at 6pm/5c on



## Pirate's Eyepatch

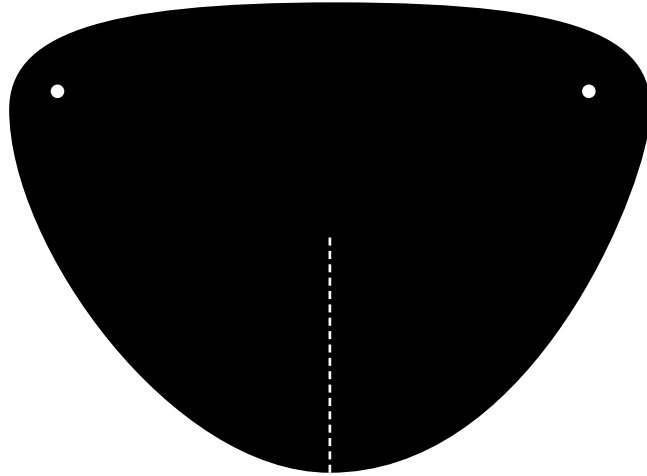

### What you'll need

You will need a printer, cutting tools and glue (or tape). Cutting is intended for grown ups only.

- Scissors
- Glue or tape
- String or thin, black sewing elastic

### Instructions

- 1. Print out the eyepatch and cut it out.**
- 2. Snip a 1 1/4-inch slit in the bottom on the dashed line. Then glue or tape the cut edges back together so that they overlap a bit, causing the patch to cup slightly.**
- 3. Next, use the tips of the scissors to make a small hole in each of the upper corners of the patch in the areas shown.**
- 4. Cut a piece of string or thin sewing elastic to a length that is just a little longer than necessary to fit around a child's head. Thread the ends through the holes in the front of the patch. Then knot the ends and gently pull them into place so the knots rest against the the inside of the patch.**